



Shaping photon-pairs time-frequency correlations in inhibited-coupling hollow-core fibers

Martin Cordier, Adeline Orioux, Benoît Debord, Frédéric Gérôme, A. Gorse, Matthieu Chafer, Eleni Diamanti, Philippe Delaye, Fetah Benabid, Isabelle Zaquine

► To cite this version:

Martin Cordier, Adeline Orioux, Benoît Debord, Frédéric Gérôme, A. Gorse, et al.. Shaping photon-pairs time-frequency correlations in inhibited-coupling hollow-core fibers. 2018 Conference on Lasers and Electro-Optics (CLEO), May 2018, San José, CA, United States. pp.1-2, 10.1364/CLEO_QELS.2018.FM4G.4 . hal-01817930

HAL Id: hal-01817930

<https://hal-iogs.archives-ouvertes.fr/hal-01817930>

Submitted on 26 Jun 2018

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Shaping photon-pairs time-frequency correlations in inhibited-coupling hollow-core fibers

M. Cordier¹, A. Orioux², B. Debord³, F. G  rome³, A. Gorse⁴, M. Chafer³, E. Diamanti²,
P. Delaye⁵, F. Benabid³ and I. Zaquine¹

¹Laboratoire de Traitement et Communication de l'Information, T  l  com ParisTech, Universit   Paris-Saclay, 75013 Paris, France

²Laboratoire d'Informatique de Paris 6, CNRS, Universit   Pierre et Marie Curie, Sorbonne Universit  s, 75005 Paris, France

³GPPMM Group, XLIM Research Institute, CNRS UMR 7252, University of Limoges, Limoges, France

⁴GLOphotonics S.A.S., 123 rue Albert Thomas, Limoges, France

⁵Laboratoire Charles Fabry, Institut d'Optique Graduate School, CNRS, Universit   Paris-Saclay, 91127 Palaiseau cedex, France

martin.cordier@telecom-paristech.fr and isabelle.zaquine@telecom-paristech.fr

Abstract: We experimentally show how multiband dispersion properties of inhibited-coupling hollow-core fibers allow to control the spectral correlations of photon pairs generated through four-wave-mixing in a fiber filled with non-linear gas.    2018 The Author(s)

OCIS codes: (060.5295) Photonic crystal fibers; (190.4380) Nonlinear optics, four-wave mixing; (270.5565) Quantum communications

Temporal modes (TM) of light are a promising resource for quantum information as they span a discrete infinite dimensional encoding basis [1]. Additionally, TM are compatible with standard fibered communication as they share the same polarization, carrier frequency and transverse spatial mode properties. Single photons in specific TM can be obtained by Spontaneous Parametric Down Conversion (SPDC) and Spontaneous Four-Wave-Mixing (SFWM) sources. Following a standard perturbative approach, the two-photon state produced by SPDC or SFWM is given by :

$$|\psi\rangle = |0\rangle_s |0\rangle_i + \kappa \int \int d\omega_s d\omega_i F(\omega_s, \omega_i) |\omega_s\rangle_s |\omega_i\rangle_i \quad (1)$$

where $F(\omega_s, \omega_i)$ defined as the Joint Spectral Amplitude (JSA) is the result of energy and momentum conservation constraints. This JSA function describes the time-frequency correlations between signal and idler photons. The Schmidt decomposition of the JSA function gives the two photons decomposition in the TM basis: $F = \sum_n \sqrt{\lambda_n} S_n(\omega_s) I_n(\omega_i)$ where the $\{S_n\}$ and $\{I_n\}$ are the TM basis of the signal and idler photons. It has been shown [2] that it is possible to reduce this decomposition to one non zero term. In this case, both signal and idler photons are generated in a single TM, giving rise to a factorable state of the pair. This can be achieved if a group velocity matching condition is satisfied (either $\beta_1(\omega_p) = \beta_1(\omega_s)$ or $\beta_1(\omega_p) = \beta_1(\omega_i)$ or $2\beta_1(\omega_p) = \beta_1(\omega_s) + \beta_1(\omega_i)$ in the case of SFWM with β_1 the inverse group velocity). Such single TM states are very useful for scalable heralded photon sources [3]. Here we show experimentally in a stimulated regime how this can be obtained in a Xenon-filled inhibited-coupling (IC) fiber.

IC fibers exhibit a discontinuous multiband dispersion [4] where the position of the discontinuities are dictated by the strut thickness. Such exotic dispersion opens new possibilities for the FWM phase matching fulfillment, and thus for tailoring the JSA. With the ability to have the pump and the generated signal and idler photons lying in different dispersion band, group-velocity matching can be easily obtained as shown in Figure 1. In order to demonstrate this experimentally, we use stimulated emission tomography. This technique consists of reconstructing slice by slice the JSA using a tunable continuous laser which seed the FWM. With a pump wavelength of 1030 nm and a seed laser at telecom wavelength, we chose an optimized fiber with a strut thickness $t=600$ nm and $40 \mu\text{m}$ inner-diameter [4]. This fiber design with a discontinuity at $1.25 \mu\text{m}$ in the dispersion allows a multiband FWM (i.e the idler lies in a different band than the pump and signal). Losses have been measured around 0.02 dB/m in the $1\mu\text{m}$ band, and 0.07 dB/m in the $1.5\mu\text{m}$ band.

The choice of Xenon is based on two important criteria: i) being a noble gas exhibiting no Raman-Scattering which is usually the main source of noise in fibered photon-pair generation; ii) high non-linearity (in the order of $10^{-21} \text{m}^2/\text{W}$ at 10 bar).

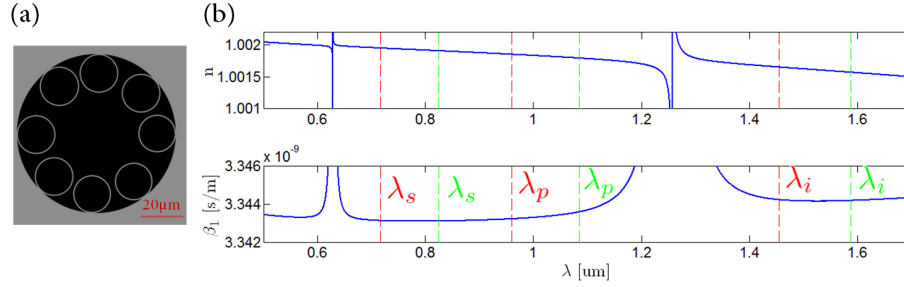


Fig. 1. (a) SEM image of the fiber cross-section (b) Calculated effective index n_{eff} and inverse group velocity β_1 of the fundamental mode in a 8 tubes IC fiber filled with Xenon (3 bar). The red and green dashed lines represent two specific four-wave-mixing configurations with respectively the fulfillment of $\beta_1(\omega_p) = \beta_1(\omega_s)$ and $2\beta_1(\omega_p) = \beta_1(\omega_s) + \beta_1(\omega_i)$.

For a given fiber design, the pump wavelength, gas pressure and fiber length are three parameters which can be tuned to access various JSA shapes as illustrated in Figure 2. Both single TM (Fig2 b. and d.) or, opposingly, multi-TM (Fig2 a. and c.) can be obtained. Changing the gas pressure impacts the medium dispersion, which results in shifting the JSA and modifying its shape. This tunability can be really useful when paralleling multiple fibers (i.e each fiber being a heralding single photon source) or to aim a specific wavelength as for instance a quantum memory atomic transition. With an adequate choice of gas pressure, we experimentally obtain a FWM involving a signal at 771 nm and an idler at 1550 nm.

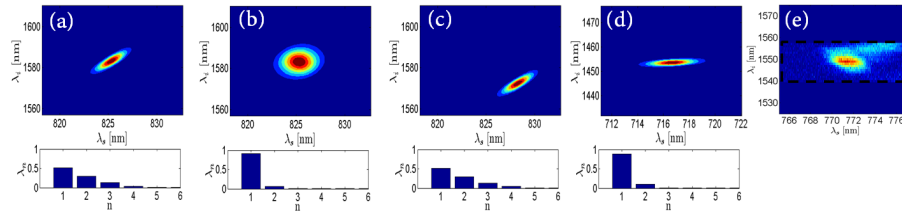


Fig. 2. Simulated (a-d) and experimental (e) JSI ($= |JSA|^2$) and their corresponding Schmidt decomposition for different configurations of length, gas pressure and pump wavelength. Starting from the conditions of (a) $P=3\text{bar}$, $\lambda_p=1085\text{ nm}$, $L=1\text{ m}$, (b-d) correspond to the change of one parameter (b) $L=30\text{ cm}$ (c) $P=2.6\text{ bar}$ (d) $\lambda_p=985\text{ nm}$ (e) preliminary experimental result obtained at $\lambda=1030\text{ nm}$. The black dashed rectangle shows the limits of our measurement range limited by the seed laser tunability.

We have made a new proposal of using multi-dispersion band medium in order to obtain a real time tuning of photon-pairs time-frequency correlations. For the first time to our knowledge, we implement this technique using gas-filled inhibited-coupling fiber. Our latest experimental results on different fiber/gas configurations will be developed during the conference.

References

1. B. Brecht, D. V. Reddy, C. Silberhorn, and M. Raymer, "Photon temporal modes: a complete framework for quantum information science," *Physical Review X* 5, 041017 (2015).
2. W. P. Grice, A. B. U'Ren, and I. A. Walmsley, "Eliminating frequency and space-time correlations in multiphoton states," *Physical Review A* 64, 063815 (2001).
3. Meyer-Scott, Evan, et al. "Filtering is not enough for pure, efficient photon pairs." *arXiv preprint arXiv:1702.05501* (2017).
4. B. Debord et al, "Ultralow transmission loss in inhibited-coupling guiding hollow fibers," *Optica*, 4, 209 (2017).